

## Freestanding Full-Function Island Drive-Up ATM

The Monimax 7600i is an advanced multi-functional free-standing island, drive-up ATM designed to provide maximum reliability, security, and convenience.

Proven deposit automation technology is provided from in-house designed and manufactured envelope-free deposit modules.

The Monimax 7600i provides continual deposit and cash service to customers with industry-leading uptime rates.

### Easy to deploy, highly scalable

The Monimax 7600i's footprint allows easy installation into virtually any existing location.

### Enhanced Security

The 7600i is equipped with dual UL level 1 safes for the depository and cash dispensing unit. Advanced security features include heat and vibration sensors, security alarms, and anti-skimming devices.



EXPERIENCE THE  
POWER OF CHOICE



**System Control**

- Microsoft® Windows XP® platform
- Intel® Pentium®-IV processor or higher
- NDC+, DDC912, User Application

**Customer Display**

- 15" color TFT LCD
- Optional
- Privacy filter
- Sunlight readable

**Communication**

- TCP/IP (SSL configurable)
- Optional
- Dial up, Wireless. X.25

**Input Type**

- PCI EPP (Encrypting PIN pad)
- Function keys
- ADA compliant
- Optional
- Touch screen
- Tilting screen

**Supervisor Operation**

- TFT color LCD, touch screen

**Card Handling**

- Dip-type card reader
- Optional
- IC card reader EMV Level 1, 2 compliant
- Anti-skimming
- Motor-driven card reader

**Cash Dispensing**

- 3,000-notes cassette, up to four cassettes
- Bundle retraction
- Automatic shutter

**Depository**

- Envelope depository
- Optional
- Bundle check scanner and acceptor
- Bundle note acceptor

**Printers**

- 3.1" graphical thermal receipt printer
- 5,000 transaction receipt printer
- Electronic journal
- Optional
- Journal printer
- Statement printer

**Security**

- UL291 Level 1 safe
- Electronic safe lock
- Optional
- KABA Mas Cencon safe lock
- security camera
- seismic and heat sensors and alarm

**Miscellaneous**

- Lead-through indicator
- Illuminated signage
- Rear-view mirror
- Optional
- Extreme-weather heater, A/C

**Power Supply**


- AC 110–240V, 50–60 Hz
- Back-up battery

**Operating Environment**

- Temperature: -31°F–122°F (-35 °C–50 °C)
- Humidity: 5%–85% (with climate control device)

**Dimension and Weight**

- Height: 56.7" (1,439 mm)
  - Width: 41.3" (1,048 mm)
  - Depth: 36" (914.4 mm)
  - Weight: 2,182 lbs (990 kg) w/ env. deposit
- (Preliminary specifications, subject to change)*

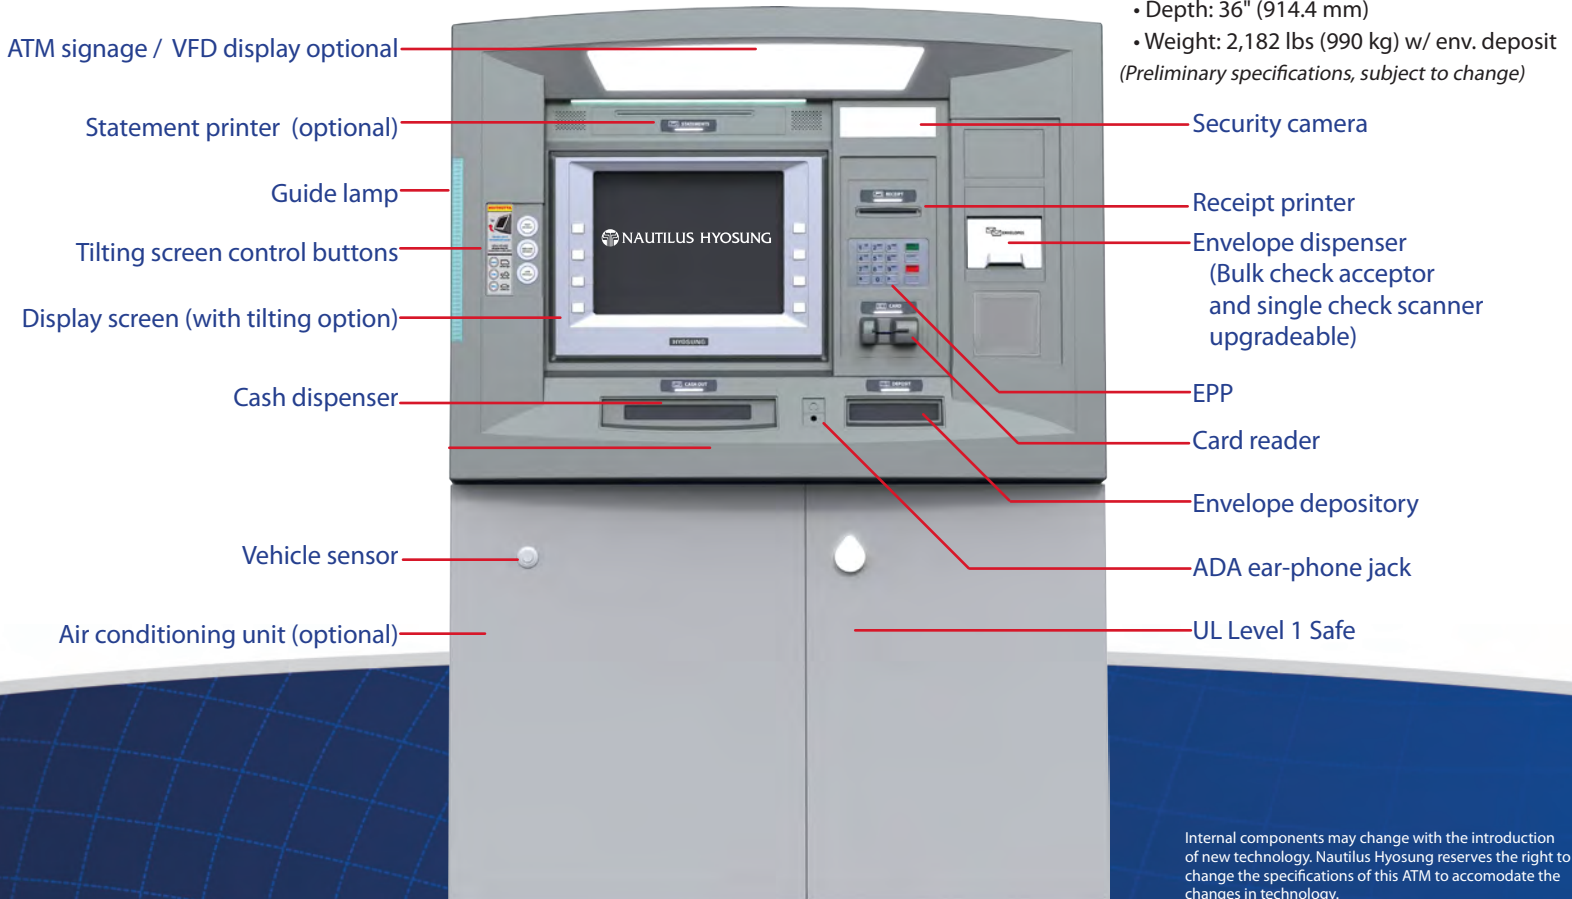

Internal components may change with the introduction of new technology. Nautilus Hyosung reserves the right to change the specifications of this ATM to accommodate the changes in technology.